



# SUBURBAN ADVANTAGE

## DIRECT FIT UPGRADE TANK WATER HEATER

**Replace competitive 6-gallon aluminum tank water heaters without unsightly and unnecessary RV sidewall modifications!**

### THE SUBURBAN ADVANTAGES

**PORCELAIN LINED STEEL TANK** - Built just like longer lasting residential tank water heaters.

**ANODE ROD** - Protects against tank corrosion and doubles as a drain.

**OPTIONAL ELECTRIC ELEMENT** - Take advantage of campsite or generator power to heat water.

**INDUSTRY EXCLUSIVE FLUE TUBE Baffles** - Slows combustion process to transfer more heat to water in tank.



DOOR NOT INCLUDED. SOLD SEPARATELY. SHOWN FOR ILLUSTRATION PURPOSES ONLY.

STOCK #	DESCRIPTION	
5320A	SAW6D, 6 Gallon, Direct Spark Ignition (DSI)	<i>Inside Mounted Switch for Atwood/Dometic Style Water Heaters</i> 
5322A*	<b>SAW6DEL, 6 Gallon, Direct Spark Ignition, Incoloy Electric Element, 12VDC relay included in wire box for use with gas &amp; electric interior wall control</b>	
6279APW	SAW6 Water Heater Door, Polar White	
6279AEB	SAW6 Water Heater Door, Black	
6279AAW	SAW6 Water Heater Door, Arctic White	

\*For most aluminum tank replacements utilizing an indoor mounted switch for LP gas ignition and electric element operation, the **SAW6DEL** Advantage water heater is the direct replacement model. Please refer to the Operation Switch images on the back for additional information.

SUBURBAN ADVANTAGE DIRECT FIT UPGRADE WATER HEATER						
MODEL NUMBER	IGNITION	ENERGY SOURCE	BTU/h INPUT	RECOVERY GALLONS PER HOUR*		
				LP GAS	ELECTRIC ELEMENT	GAS/ELECTRIC COMBINED
SAW6D^	DIRECT SPARK	LP GAS	10,000	14.14		
SAW6DEL^^	DIRECT SPARK	LP GAS & 1440 WATT ELECTRIC ELEMENT, 120 VAC		14.14	6.10	20.24

^ Requires Switch 234589 (Inside mounted switch for control of water heater gas ignition)

^^ Requires Switch 232882 (12 Volt ON/OFF Switch mounted inside for control of water gas ignition and powers the electric element circuit)

\*Recovery rate calculations based on temperature rise of 60°F (typical input water temperature of 70°F) to reach set point temperature of 130°F. Varies based on LP supply. Please refer to the recovery chart on back for additional information.

**INSTALLATION AND SERVICE MUST BE PERFORMED BY A QUALIFIED INSTALLER, SERVICE AGENCY OR THE GAS SUPPLIER**


The Suburban Advantage Direct Fit Upgrade Tank Water Heater is the **ONLY** water heater on the market that is **A DIRECT REPLACEMENT AND DOES NOT REQUIRE**

- cut-out modifications;
- interior cabinet modifications for depth; OR
- major modifications for plumbing connections.

The Suburban Advantage Direct Fit Upgrade Tank Water Heater is the most economical choice when replacing a Dometic/Atwood style water heater.

**Dometic’s Original “G” Model**  
6 gal. cut-out dimensions:  
12.625”H x 16.125”W

**Dometic’s New “WH Series”**  
6 gal. cut-out dimensions:  
12.75H x 12.75”W

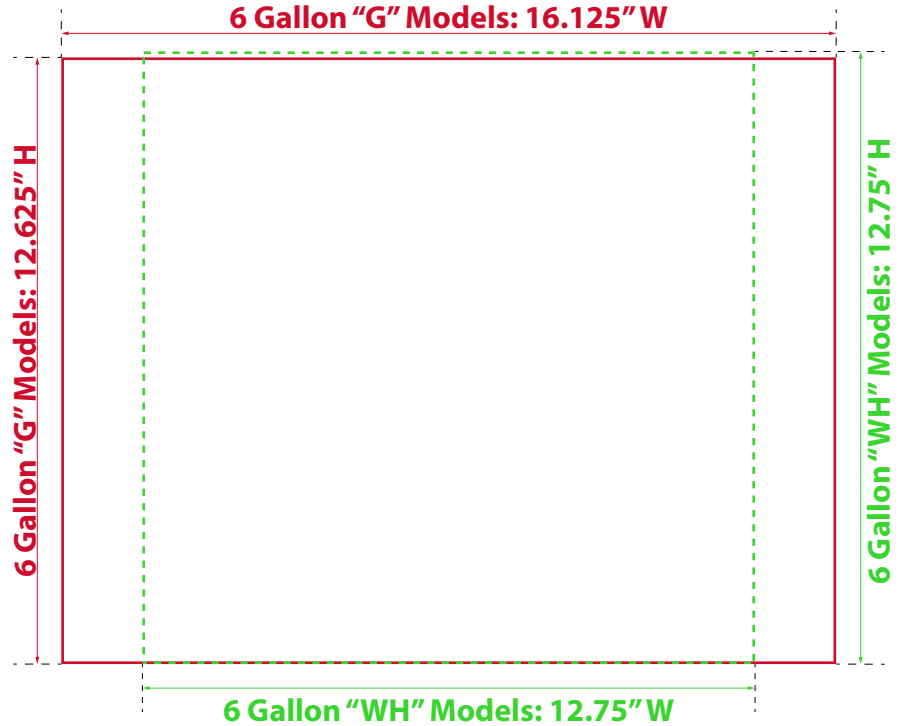

**ADDITIONAL ADVANTAGES:**

- Repositionable module board provides installation flexibility
- Backed by a 2 year limited warranty and the tank is backed by a 3 year tank limited warranty - the best in the RV industry
- Assembled in the USA by Suburban, the leader in RV water heaters.

*Suburban Advantage Water Heater doors are available. Sold Separately.*

**RECOVERY RATE CHART**

SET POINT TEMPERATURE	INPUT WATER TEMPERATURE	SUBURBAN RECOVERY RATE USING LP GAS (Gallons Per Hour)	ELECTRIC ELEMENT RECOVERY RATE (Gallons Per Hour)	COMBINED LP GAS & ELECTRIC ELEMENT RECOVERY RATE (Gallons Per Hour)
130° F	50° F	10.61	6.10	16.71
130° F	70° F	14.14	6.10	20.24

*Recovery Rate as defined in Clause 3, Definitions in ANSI Z21.10.1-2017 ·CSA 4.1-2017*

**UNIT DIMENSIONS:** 12.50” H x 16.125” W x 17.625” D | **CUTOUT DIMENSIONS:** 12.625” H x 16.25” W

*Specifications are subject to change without notice.*

Airxcel Inc. Recreation Vehicle Products Brand Portfolio:



For more information, visit [www.airxcel.com/suburban](http://www.airxcel.com/suburban)

© 2020, Suburban, a Division of Airxcel • 676 Broadway Street • Dayton, TN 37321 U.S.A.