



RV Products Division

**COLEMAN-MACH  
DATA INQUIRY SHEET  
470X3B87X  
13,500 MACH 8 HEAT PUMP**

Capacity (Nominal BTUH)	Cooling/Heating Heating (Electric Strip) (1)	13,500 6,000
Electrical Rating	115 VAC, 60 HZ, 1 Phase	
Cooling Full Load AMP's at A.R.I. Standard Condition	Compressor I.D. Motor Low -.7 High - 1.3 O.D. Motor	10.1 1.8
Feature Equipment Amps	Heating (1)	15.2
Running Watts (cooling) A.R.I. Standard Condition (80 F. DB 67 F. WB Indoor, 95 F. DB Outdoor)	1375	
Running Watts (cooling) Desert Condition (100 F. DB 72 F. WB Indoor, 120F. DB Outdoor)	1700	
Running Watts (1) Electric Strip	1748	
Compressor Locked Rotor Amps	54.2	
Metering Device	Bi-Flow Restrictor	
Refrigerant Charge - R-410A	17.00 oz.	
Evaporator Air Delivery (CFM)	300 - High Speed	
Generator Size	See "Generators" Below	
Unit Weight (pounds)	93 lbs. (2)	
Use time delay fuse or circuit breaker Max. rated 25 Amps, Use min. 10 AWG copper supply wires. Use time delay fuse or circuit breaker Min. rated 20 Amps, Use min. 12 AWG copper supply wires.		

- (1) When equipped with Elect-A-Heat feature.
- (2) Ceiling assemblies may add an additional 3.5 to 12.5 lbs. depending on the model number.

**CEILING ASSEMBLY:** Any 8530 or 9530 Series


**GENERATORS:**

It is not the policy of Airxcel, Inc. to size generators for application in Recreation Vehicles or related structures. However, when sizing generators, the total electrical power consumption in Watts must be determined and taken into consideration, such as:

- A. Maximum running watts of the air conditioner at Airxcel, Inc. Desert Test (See Specifications).
- B. Power consumption of electronic ovens, toasters, coffeemakers, television sets, refrigerators, lights, etc.
- C. Generators do lose capacity under the following conditions: (1) Altitude increases above sea level, (2) Temperature increases above certain outdoor design temperatures, and (3) Lack of maintenance.

**Airxcel Inc.  
RV Products Division  
P.O. Box 4020  
Wichita, KS 67204**

## ROOF TOP UNIT DIMENSIONS

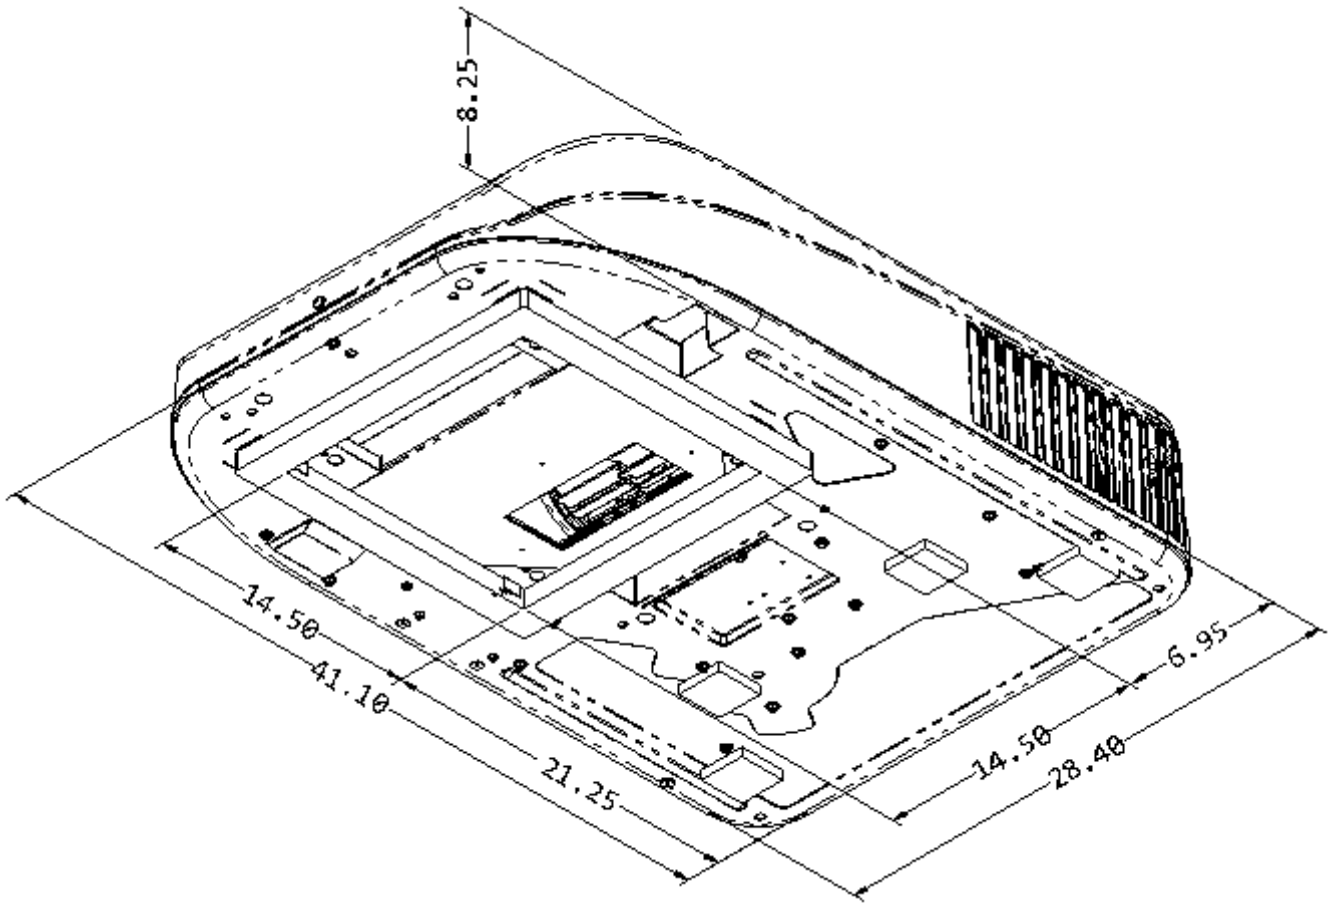

### QUICK REFERENCE CHART

DIMENSIONS	
Exterior Shroud	Height 8.25
	Width 28.40
	Length 41.10
Interior Shroud	Depth 2.2
	Width 19.9
	Length 20.1

### CEILING SHROUD DIMENSIONS

